


wedi *Tools* | Sealing tape, fleece laminated

- Fleece-lined
- For indoors and outdoors
- Good adhesion

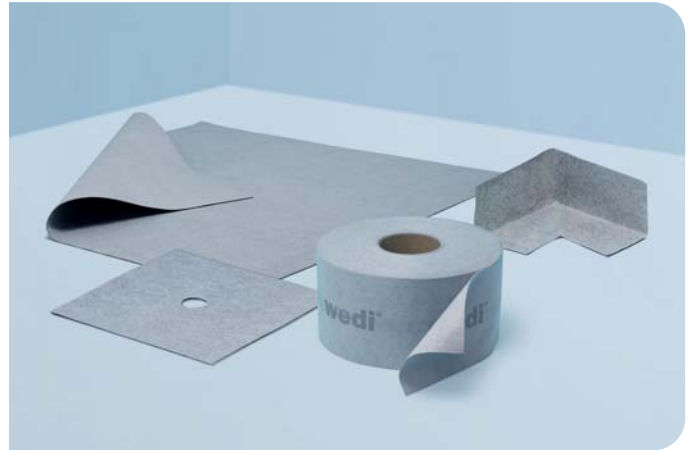

General product description

wedi Tools sealing tape consists of a TPE-coated polypropylene fleece.

Applications

For secure sealing of corner, connecting and butt joints and intersections.

Processing

When sealing joints and intersections, wedi Tools sealing tapes must be cemented into the fresh thin-bed mortar/sealant/epoxy resin adhesive and pressed in with a smoothing trowel, depending on the load. When using epoxy resin adhesive, the surface must be cemented over and sprinkled with quartz sand.

The wedi Tools sealing tapes must overlap by at least 5 cm. The appropriate wedi Tools sealing sleeves are used when sealing floor drains and intersections.

Technical properties

Stable, longitudinally rigid and laterally elastic joint sealing tape

Type	TPE-coated polypropylene fleece
Colour	grey
Overall width	100 mm / 120 mm
Coating width	100 mm / 120 mm
Overall thickness	approx. 0.70 mm
Weight	43 g/m
Maximum longitudinal tensile strength	approx. 104 N / 15 mm
Maximum lateral tensile strength	approx. 23 N / 15 mm
Elongation at break, longitudinal	approx. 70%
Elongation at break, lateral	approx. 335%
Resistance to water pressure (1.5 bar)	> 1.5 bar
Resistance to chemicals	specified as per ZDB data sheet
Waterproofness	specified as per ZDB data sheet
UV resistance	> 500 h
Temperature resistance	-30°C / +90°C

Packing

- Sealing tape 10/50 m rolls in individual boxes (at 120 mm width)
- Sealing tape 50 m roll in an individual box (at 100 mm width)
- Sealing corners, 120 x 120 mm (25 units/box)
- Sealing sleeves 100 x 100 mm (25 units/box)
- Sealing sleeves 400 x 400 mm (10 units/box)

Storage

Can be stored for approximately 12 months in a cool, dry place. Protect from sunlight.

Safety notice

none